

CONTROLLER

1-channel
Temperature Controller
with Built-in SSR


SB1 Series



(Actual size)



CE, UL, c-UL




SSR and controller integrated into a compact temperature control box.

SB1 Series

- Capable of direct connection to the load.

Temperature control can be easily assembled and started by connecting a heater line and temperature sensors to the SB1. Wiring is handled with connectors to reduce wiring time.

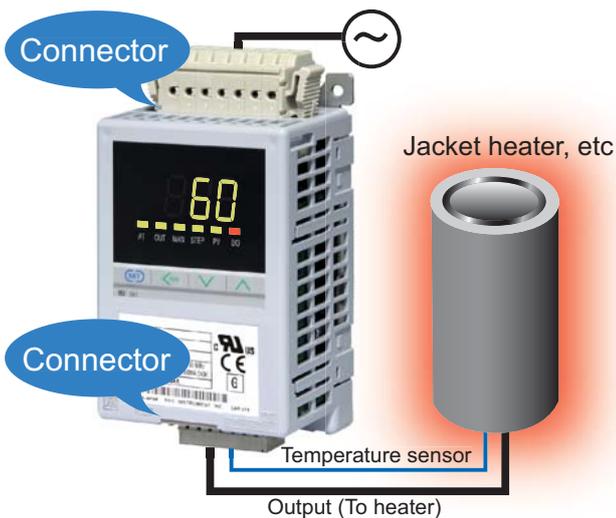

(*) Permissible load capacity may be less than 7A depending on the ambient temperature of the installation location.

- Data can be viewed on site by using the display and operation keys or controlled remotely via loader communication port.

The SB1 has a display, setting keys and loader communication port on the front panel.




- Power saving by SB Link

Peak current suppression (SB Link)

When SB1 controllers are divided into groups (max. 4 pcs per group) with the output limiter, the controllers in the same group will not turn on simultaneously.

Saves energy by limiting the control output around the normal load factor.

* SB Link cannot be used simultaneously with a host communication.

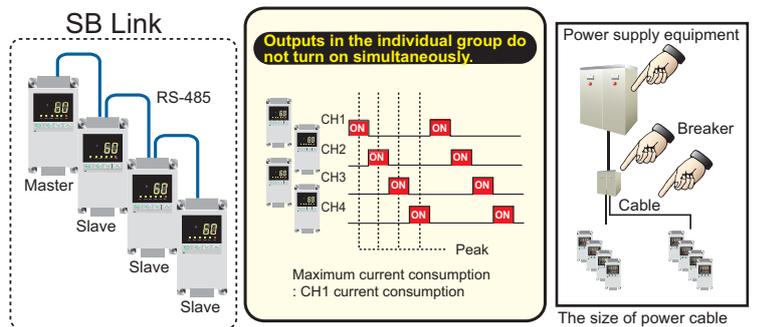


The size of power cable and power supply equipment can be minimized.


Can be installed in a small space or onto a pipe.

The SB1 can be supplied with pipe wrapping type, pipe hanging type, DIN-rail mounting type, or panel mounting type. Proper mounting can be attained according to the pipe configuration.

Pipe wrapping type

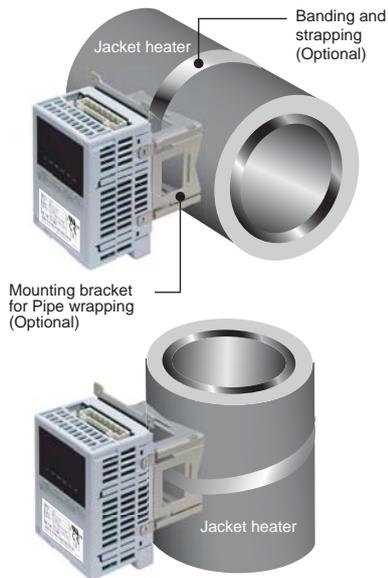

Pipe hanging type

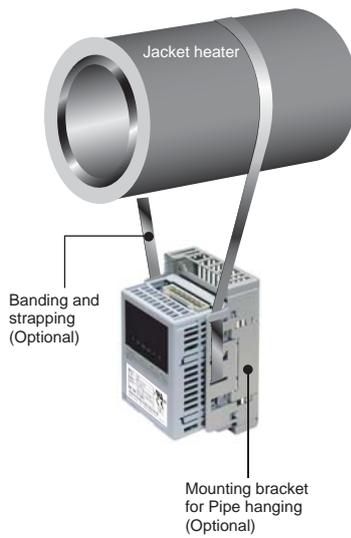

DIN rail mounting type




Panel mounting type



Safety design

< Load Power Shutoff Function + Fuse >
This function disconnects internal load power with an internal relay. A fuse is incorporated inside the SB1 to protect the instrument from a load short-circuit.

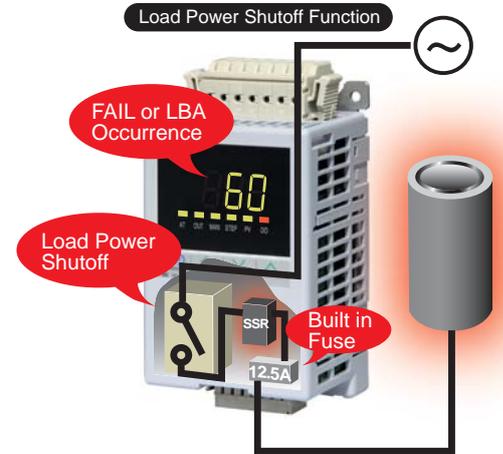


* Internal fuse must be replaced by an authorized personnel.

Action of the load power shutoff function can be selected from the following:


1. Works at the time of FAIL.
2. Works at the time of FAIL or LBA.
3. Works at the time of FAIL or LBA. (status retained)

Installation and wiring example

<Data monitoring and setting>

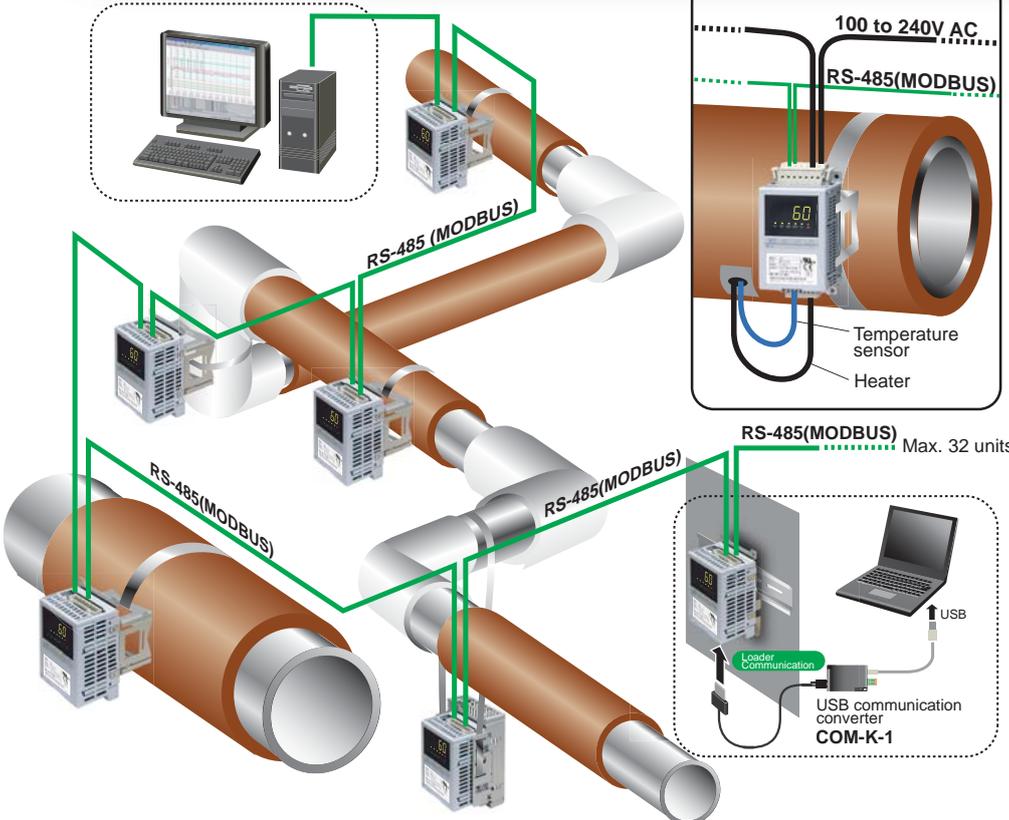

Input/Output Configuration

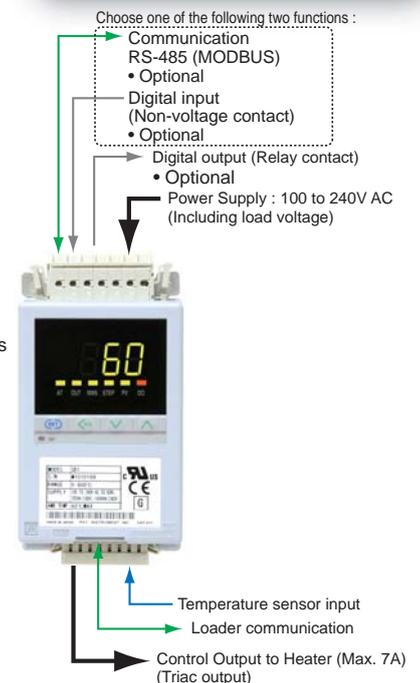

SPECIFICATIONS

Input

| | |
|--|---|
| Measured input | Thermocouple input K, J (JIS/IEC) : 0 to 800°C, 0 to 999°F RTD input Pt100 (JIS/IEC) : 0 to 400°C, 0 to 800°F • 1/0.1°C(°F) display can be selectable on only communication data. • Universal input |
| Accuracy | Thermocouple input 0°C or more, Less than 500°C : ± (1.5°C [2.7°F] + 1 digit) 500°C or more : ± (0.3% of Reading + 1 digit) RTD input 0°C or more, Less than 200°C : ± (0.6°C [1.1°F] + 1 digit) 200°C or more : ± (0.3% of Reading + 1 digit) |
| Cold-junction temperature compensation error | ±1°C [1.8°F] (23°C±2°C [73°F±3.6°F]) ±2°C [3.6°F] (-10 to 60°C [14 to 140°F]) |
| Sampling time | 0.25sec |
| Influence of external resistance | 0.25μV/Ω (Thermocouple input) |
| Influence of lead resistance | 0.02% of reading/Ω (RTD input) • Maximum 10Ω per wire |
| Input impedance | 1MΩ or more |
| PV bias | -199 to 999°C [°F] |
| Input digital filter | 0 to 100 sec. (OFF when 0 is set.) |

Control


| | |
|---------------------|--|
| Control method | PID control (With autotuning) • P, PI, PD, ON/OFF control selectable |
| Setting range | a) Proportional band : 1 to span (°C,°F) (ON/OFF control when P = 0) • Differential gap at ON/OFF control : 0 to 100 (°C,°F) b) Integral time : 1 to 999 sec (PD control when I = 0) c) Derivative time : 1 to 999 sec (PI control when D = 0) d) Anti-Reset Windup(ARW) : 1 to 100% of heat side proportional band (Integral action is OFF when ARW = 0) e) Output limiter : -5 to +105% (High/Low individual setting) f) Proportional cycle time : 1 to 100 seconds |
| Additional function | Startup tuning, Fine tuning, Measured value derivative/Deviation derivative selection Manual control |

Control output

| | |
|-----------------------------------|--|
| Output type | Triac output (control output) Output method: AC output (Zero-cross method) Allowable load current: 7 A (Ambient temperature 40°C or less) Set the surface temperature to the following degree if the allowable load current exceeds 3A: • Front side: 80°C or less • Metal at the back side: 100°C or less Load voltage: 100 to 240 V AC (Same as the power supply voltage) Minimum load current: 50 mA ON voltage: 1.5 V or less (at maximum load current) |
| Load Power Shutoff Function | The relay for Load power shutoff opens at the occurrence of instrument abnormality (FAIL) or Control loop break alarm (LBA). (Shut off the internal load power line. [L side of the power]) [Selectable action] • Relay for Load power shutoff opens at FAIL (Restores when FAIL is resolved.) • Relay for Load power shutoff opens at FAIL or LBA (FAIL state or LBA state remains *) • Relay for Load power shutoff opens at FAIL or LBA (Returns to the normal state when FAIL state or LBA state recovers.) |
| Peak current suppression function | When a group of controllers (up to 4 units) is connected by SB link, use the Peak current suppression function by setting Output limiter high to prevent all outputs from turning ON at the same time |

Setting

| | |
|-------------------|--|
| SV limiter | Scaling low to scaling high (High/Low individual setting) |
| Ramp-to-setpoint | 1 to span per Time (Time : 1 minute/1 hour (Selectable) Up/Down individual setting) |
| Setting data lock | Lock level : 1 to 10 level (0 : No lock) |
| SV step function | Number of SV : 2 points (SV1/SV2) |

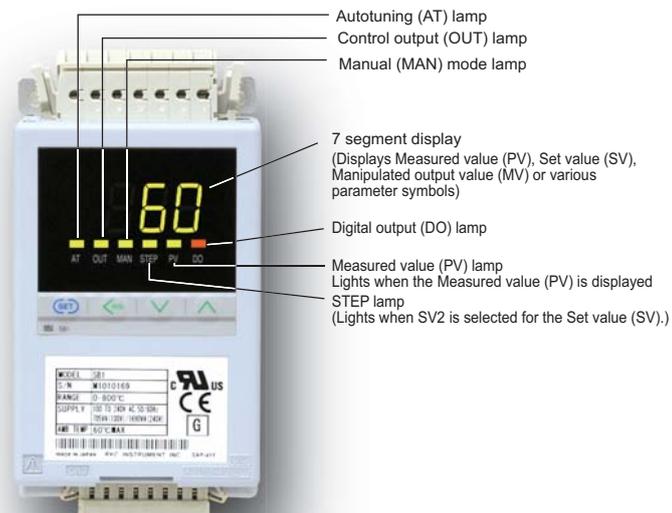

Event (Alarm)

| | |
|------------------|---|
| Number of events | 2 points |
| Event type | Process high, Process low, Deviation high, Deviation low, Deviation high/low ^{*1} , Band, Set value high, Set value low, LBA (Control loop break alarm), RUN status monitor FAIL, Output of the communication monitoring result, ^{*1} : Two types of alarm settings are field-selectable. 1. Independent high and low settings. 2. Common high/low setting |
| Delay timer | 0 to 600 sec |
| Other functions | a) Interlock (latch) function is configurable b) Hold/Re-hold action c) Energized/Re-energized action is configurable. |

Digital output (DO) (Optional)

| | |
|------------------|---|
| Number of output | 1 point |
| Output | Relay contact output, Form a contact, 250V AC 1A, 30V DC 0.5A (Resistive load) • Electric life : 150,000 cycles or more |
| Function | Event (Alarm) output |

Digital Input (DI) (Optional) • Not available with Communication

| | |
|-----------------|--|
| Number of input | 1 point |
| Input method | Non-voltage contact input |
| Function | SV1/SV2 selection, STOP/RUN, Auto/Manual, Alarm interlock reset, • Selectable |

Communications (Optional) • Not available with Digital Input (DI)

| | |
|----------------------|--|
| Communication method | RS-485 |
| Communication speed | 2400bps, 4800bps, 9600bps, 19200bps |
| Protocol | a) ANSI X3.28 sub-category 2.5A4 (RKC standard) b) MODBUS-RTU |
| Bit format | a) RKC standard protocol Start bit : 1, Data bit : 7 or 8, Parity bit : 1 (odd or even) or none, Stop bit : 1 or 2 b) MODBUS protocol Start bit : 1, Data bit : 8 Parity bit : 1 (odd or even) or none, Stop bit : 1 or 2 |
| Maximum connection | 31 units |
| Terminating resistor | External installation is necessary (120Ω 1/2W) |
| Buffer mode | Correspond (Mode in which writing to EEPROM is not performed for setting changes) |

Inter-controller Communication (SB Link) (Optional) • Not available with Digital Input (DI)

| | |
|----------------------|--|
| Function | Peak current suppression function When a group of controllers (up to 4 units) is connected by SB link, use the Peak current suppression function by setting Output limiter high to prevent all outputs from turning ON at the same time |
| Communication method | RS-485 |
| Communication speed | 19200bps |
| Protocol | MODBUS-RTU |
| Bit format | Start bit : 1, Data bit : 8, Parity bit : None, Stop bit : 1 |
| Maximum connections: | 4 controllers (Address setting range: 0 to 3 *) * Address No. 0 is for Master controller. |


Loader communication

| | |
|---------------------|--|
| Protocol | ANSI X3.28 sub-category 2.5A4 (RKC standard) |
| Communication speed | 9600bps |
| Bit format | Start bit : 1, Data bit : 8, Parity bit : none, Stop bit : 1 |
| Maximum connection | 1 unit (Address : 0) |
| Connection method | COM-K loader cable (equivalent to W-BV-01-1500) |

General Specifications

| | |
|--|--|
| Supply voltage | 90 to 264V AC (50/60Hz) Rating : 100 to 240V AC |
| Power consumption (When a load is disconnected) | 4.0 VA max. (at 100 V AC) Rush current: 5.6 A or less 6.7 VA max. (at 240 V AC) Rush current: 13.3 A or less |
| Power consumption (When a load is connected) [Ambient temperature: 40°C] | 705 VA max. (When connecting a load equivalent to 7A at 100 V AC) Rush current: 5.6 A or less 1690 VA max. (When connecting a load equivalent to 7A at 240 V AC) Rush current: 13.3 A or less |
| Ambient temperature | -10 to 60°C (14 to 140°F) |
| Ambient humidity | 5 to 95%RH (Non condensing) • Absolute humidity : MAX.W.C29.3g/m3 dry air at 101.3kPa |
| Weight | Approx. 130g (Instrument only) |
| Safety standards | UL: UL61010-1, cUL: CAN/CSA-C22.2 No. 61010-1 |
| CE marking | LVD: EN61010-1 OVERVOLTAGE CATEGORYII, POLLUTION DEGREE 2 EMC: EN61326-1 |

Temperature characteristics of load current

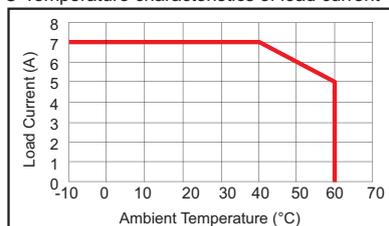

CAUTION



Temperature of the Installation position (surface of a jacket heater) : -10 to +100°C.

External Dimensions


Unit : mm

(Panel mounting hole dimensions)



Panel mounting type

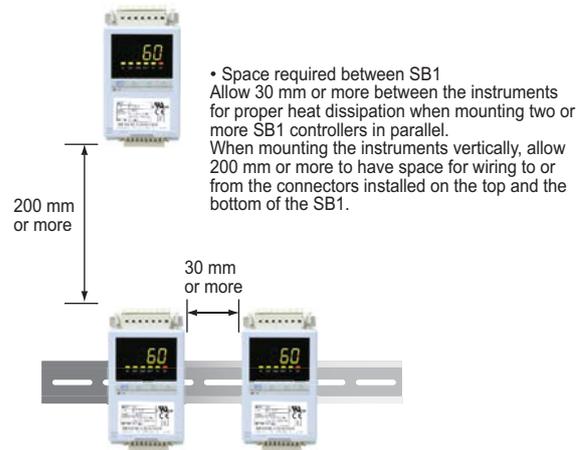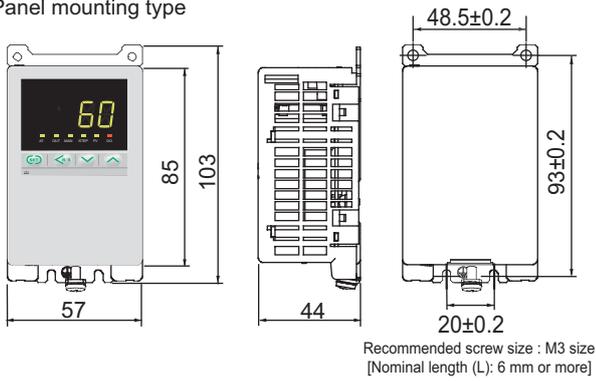



DIN rail mounting type

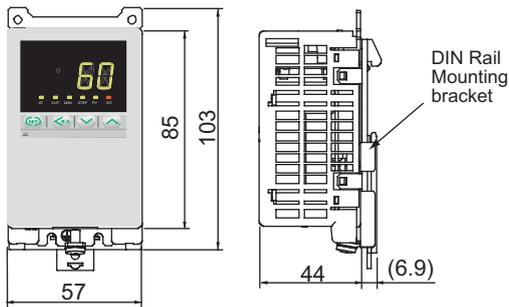

Pipe hanging type

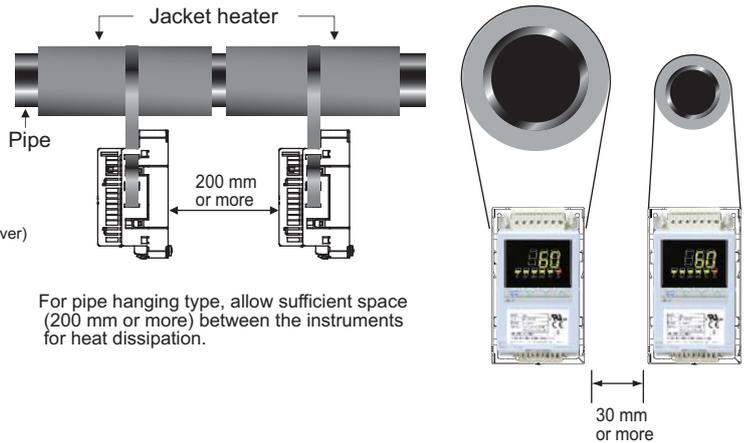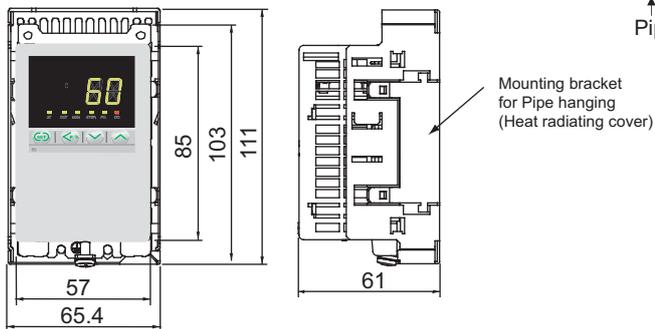

Pipe wrapping type

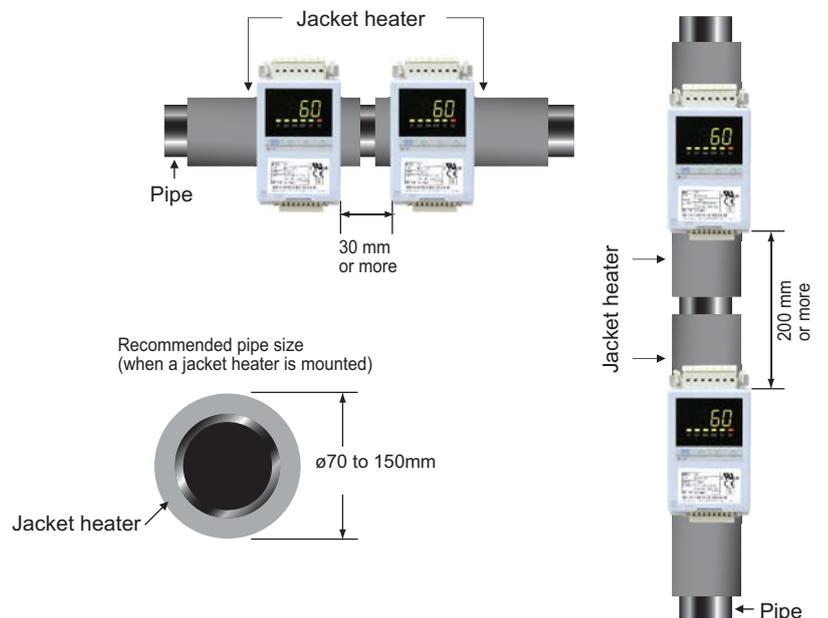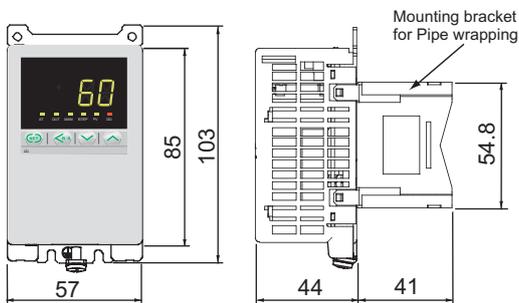

Model and Suffix Code

| | Temperature Controller with Built-in SSR | Hardware coding only | | | | | | | | | | Quick start code |
|------------------------------------|---|----------------------|---|---|---|---|---|---|---|---------|---|------------------|
| | | ① | ② | ③ | ④ | ⑤ | ⑥ | ⑦ | ⑧ | ⑨ | ⑩ | ⑪ |
| | SB1 F <input type="text"/> <input type="text"/> <input type="text"/> -T-4* <input type="text"/> | | | | | | | | | | | |
| ① Control Method | PID control with AT (Reverse action) | F | | | | | | | | | | |
| ② Input and range | See Input range Code Table | | | | | | | | | | | |
| ③ Control output (OUT) | Triac output | | | T | | | | | | | | |
| ④ Power supply | 100 to 240V AC | | | | 4 | | | | | | | |
| ⑤ Digital output (DO) | Not supplied | | | | | N | | | | | | |
| | Digital output : 1 point | | | | | 1 | | | | | | |
| ⑥ Communication/Digital input (DI) | Not supplied | | | | | | N | | | | | |
| | Digital input : 1 point | | | | | | D | | | | | |
| | RS-485 (ANSI/RKC standard protocol) | | | | | | 5 | | | | | |
| | RS-485 (MODBUS protocol) | | | | | | 6 | | | | | |
| ⑦ Mounting method | Without mounting bracket (Panel mounting) | | | | | | | N | | | | |
| | With mounting bracket (Sold separately) | | | | | | | 1 | | | | |
| ⑧ Quick start code | No quick start code (Default setting) | | | | | | | | N | | | |
| | Specify quick start code (Event, Digital output type) | | | | | | | | 1 | | | |
| ⑨ Event 1 (Alarm 1) type | No quick start code (Default setting) | | | | | | | | | No Code | | |
| | See Alarm Code Table | | | | | | | | | | | |
| ⑩ Event 2 (Alarm 2) type | No quick start code (Default setting) | | | | | | | | | No Code | | |
| | See Alarm Code Table | | | | | | | | | | | |
| ⑪ Digital output assignment | No quick start code (Default setting) | | | | | | | | | No Code | | |
| | Event 1 | | | | | | | | | 1 | | |
| | Event 2 | | | | | | | | | 2 | | |
| | Logical OR of Event 1 and Event 2 | | | | | | | | | 3 | | |
| | Logical AND of Event 1 and Event 2 | | | | | | | | | 4 | | |

Input range Code Table (Universal input)

| Thermocouple Input | | | | | |
|--------------------|------------|------|-------|------------|------|
| Input | Range | Code | Input | Range | Code |
| K | 0 to 800°C | K04 | J | 0 to 800°C | J04 |
| | 0 to 999°F | KB1 | | 0 to 999°F | JA8 |

RTD Input

| Input | Range | Code |
|-------|------------|------|
| Pt100 | 0 to 400°C | D17 |
| | 0 to 800°F | DB4 |

• 1/0.1°C(°F) display can be selectable on only communication data.

Event Code Table (Programmable)

| Code | Event Type |
|------|--|
| N | No event |
| A | Deviation High |
| B | Deviation Low |
| C | Deviation High/Low (Common high/low setting) |
| D | Band (Common high/low setting) |
| E | Deviation High with Hold |
| F | Deviation Low with Hold |
| G | Deviation High/Low with Hold (Common high/low setting) |
| H | Process High |
| J | Process Low |
| K | Process High with Hold |
| L | Process Low with Hold |
| Q | Deviation High with Alarm Re-hold |
| R | Deviation Low with Alarm Re-hold |
| T | Deviation High/Low with Re-Hold (Common high/low setting) |
| U | Band (Individual high and low settings) |
| V | Set value High |
| W | Set value Low |
| X | Deviation High/Low (Individual high and low settings) |
| Y | Deviation High/Low with Alarm Hold (Individual high and low settings) |
| Z | Deviation High/Low with Alarm Re-Hold (Individual high and low settings) |
| 2 | Loop break alarm |
| 3 | FAIL |
| 4 | RUN status |
| 5 | Output of the communication monitoring result |

Mounting type Accessories

Panel mounting Type

| SB1/Accessory | Model Code |
|------------------------|---|
| SB1 | SB1F <input type="text"/> <input type="text"/> <input type="text"/> -T-4* <input type="text"/> (N) <input type="text"/> <input type="text"/> <input type="text"/> |
| Connector (upper-side) | SB1P-C02  |
| Connector (lower-side) | SB1P-C01  |

DIN rail mounting Type

| SB1/Accessory | Model Code |
|---------------------------|---|
| SB1 | SB1F <input type="text"/> <input type="text"/> <input type="text"/> -T-4* <input type="text"/> (1) <input type="text"/> <input type="text"/> <input type="text"/> |
| DIN rail mounting bracket | SB1P-M03  |
| Connector (upper-side) | SB1P-C02  |
| Connector (lower-side) | SB1P-C01  |

Pipe hanging Type

| SB1/Accessory | Model Code |
|-----------------------------------|---|
| SB1 | SB1F <input type="text"/> <input type="text"/> <input type="text"/> -T-4* <input type="text"/> (1) <input type="text"/> <input type="text"/> <input type="text"/> |
| Mounting bracket for Pipe hanging | SB1P-M02  |
| Banding and strapping | SB1P-B02  |
| Connector (upper-side) | SB1P-C02  |
| Connector (lower-side) | SB1P-C01  |

Pipe wrapping Type

| SB1/Accessory | Model Code |
|------------------------------------|---|
| SB1 | SB1F <input type="text"/> <input type="text"/> <input type="text"/> -T-4* <input type="text"/> (1) <input type="text"/> <input type="text"/> <input type="text"/> |
| Mounting bracket for Pipe wrapping | SB1P-M01  |
| Banding and strapping | SB1P-B01  |
| Connector (upper-side) | SB1P-C02  |
| Connector (lower-side) | SB1P-C01  |

Accessories (Sold Separately)

● Mounting bracket • Mounting brackets are not necessary when using panel mounting type.

DIN rail mounting Type



DIN rail mounting bracket
SB1P-M03

Pipe hanging Type



Mounting bracket
for Pipe hanging
SB1P-M02

Banding and
strapping
SB1P-B02

30mm I

30mm I



< Manufactured by PANDUIT Corporation >
Stainless steel banding and strapping : MBH-TLR
(Heavy type, Width : 7.9 mm, Length : 1000mm)

Pipe wrapping Type


Mounting bracket
for Pipe wrapping
SB1P-M01



Banding and
strapping
SB1P-B01



< Manufactured by PANDUIT Corporation >
Stainless steel banding and strapping : MLT6EH-LP
(Extra heavy Width : 12.7 mm, Length : 594mm)



● Connector and Tool for cable wiring

Connector



Power supply/
Event input/output/
Communication
connector

SB1P-C02

• Manufactured by
WAGO Corporation:
721-2107/037-000



Measured input/Control
output connector

SB1P-C01

• Manufactured by
WAGO Corporation:
734-108/037-000

Wiring tool

Tool for SB1P-C02
SB1P-C13

• Manufactured by
WAGO Corporation:
210-720
Partially isolated
shaft Type 2



Tool for SB1P-C01
SB1P-C11

• Manufactured by
WAGO Corporation:
210-719
Partially isolated
shaft Type 1



OR

SB1P-C12

• Manufactured by
WAGO Corporation:
734-230
Push button for
connectors
(Connector operating
lever)




• A small screwdriver can be used for wiring.

● USB communication converter (Loader Communication)



Model Code : USB communication converter (COM-K)




| Specifications | Model and Suffix code | |
|----------------------------|------------------------------------|--------------------------|
| | COM-K- | <input type="checkbox"/> |
| Loader communication cable | Without loader communication cable | N |
| | With loader communication cable | 1 |



Model Code for cable only
W-BV-01-1500

Connector Configuration

Caution Maximum allowable current (power supply part) is 15 A.

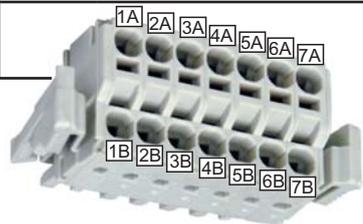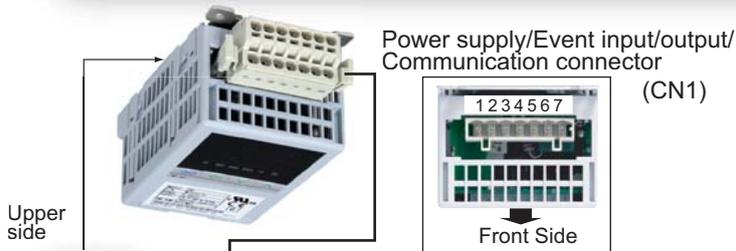

Connector (Sold Separately)

Model Code : SB1P-C02



• Manufactured by WAGO Corporation:
721-2107/037-000


- Recommended cable
Compatible cable diameter : 12 AWG (2.5 mm²)
Stripping length : 9 to 10 mm

- The pins of the same number at line A and line B of the Plug are connected internally.
- Communication and Digital input (Event input) cannot be selected at the same time.

| Pin No. | 1A 1B | 2A 2B | 3A 3B | 4A 4B | 5A 5B | 6A 6B | 7A 7B |
|-------------|------------------------|---------------------|----------|------------------------------|---------------|----------------|----------|
| Description | SG | T/R(A) T/R(B) | RS-485 | NO | Relay contact | L | N |
| | Communication (Option) | | | | | 100 to 240V AC | |
| | DI | Non-Voltage contact | | Digital output (DO) (Option) | | Power supply | |

Wiring tool (Sold Separately)

Model Code : SB1P-C13




① Tool
② Cable

- Manufactured by WAGO Corporation:
210-720
Partially isolated shaft Type 2
- A small screwdriver can be used for wiring.




Note

The pin No. 7 (N) of the Power supply terminal and the pin No. 7 and No. 8 of the Control output terminal are connected internally.



Connector (Sold Separately)

Model Code : SB1P-C01



• Manufactured by WAGO Corporation:
734-108/037-000


- Recommended cable
Compatible cable diameter : 14 AWG (1.5 mm²)
Stripping length : 6 to 7mm

- The pin No. 5 and No.6, the pin No. 7 and No. 8 are connected internally.


| Pin No. | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 |
|-------------|----------------------------------|---|-----------------|---|---|-------|---|---|
| Description | Note | N | Triac AC output | L | Heater | (1) B | B | A |
| | Control output (OUT) SSR (Triac) | | | | Measured input (1) Thermocouple (2) RTD | | | |

Wiring tool (Sold Separately)


Model Code : SB1P-C11



- Manufactured by WAGO Corporation:
210-719
Partially Isolated shaft Type 1
- A small screwdriver can be used for wiring.



or
Model Code : SB1P-C12



- Manufactured by WAGO Corporation:
734-230
Push button for connectors
(Connector operating lever)



Safety Warning

- Before operating this product, read the instruction manual carefully to avoid incorrect operation.
- This product is intended for use with industrial machines, test and measuring equipment. It is not designed for use with medical equipment.
- If it is possible that an accident may occur as a result of the failure of the product or some other abnormality, an appropriate independent protection device must be installed.

Caution for the export trade

All transactions must comply with laws, regulations, and treaties.

Caution : Avoid imitated products

Imitation of RKC products are appearing in the marketplace. RKC will not warrant such products nor bear the responsibility for any damage and/or accident caused by their use and urge caution when making your purchase.

RKC® RKC INSTRUMENT INC.
(RIKA KOGYO CO.,LTD)

HEAD OFFICE : 16-6, KUGAHARA 5 CHOME OHTA-KU TOKYO 146-8515 JAPAN
PHONE : 03-3751-9799 (+81 3 3751 9799)
Email : info@rkcinst.co.jp
FAX : 03-3751-8585 (+81 3 3751 8585)
http://www.rkcinst.com/