



背圧式レベル計

LE100A/LE110A

IMR01C30-X1

NOV. 2024

対象取扱説明書番号: IMR01C20-X□, IMR01C21-J□, IMR01C28-J□
IMR01C23-X□, IMR01C24-J□, IMR01C29-J□

本説明書は、Z-1302 仕様の取付方法に関する事項のみを説明しています。
Z-1302 仕様のその他の機能については、LE100A Z-1302 仕様説明書 (IMR01C28-J□) または LE110A Z-1302 仕様説明書 (IMR01C29-J□) を参照してください。

■ 概 要

Z-1302 仕様は、取付具および取付方法が標準仕様と異なります。

■ 取付方法


● パネル厚が 1~4 mm の場合

1. パネルカット寸法を参照して、パネルに取り付ける台数分の角穴をあけます。
2. LE100A/LE110A はすでに取付具が取り付けられていますので、そのまま LE100A/LE110A をパネル前面から挿入します。LE100A/LE110A をパネルにしっかりと固定します。


● パネル厚が 5~9 mm の場合

1. パネルカット寸法を参照して、パネルに取り付ける台数分の角穴をあけます。
2. 取付具 (上下 2 個) を LE100A/LE110A からマイナスドライバーで取り外します。
3. 5~9 mm 用の取付溝に取付具を差し込みます。
4. LE100A/LE110A をパネル前面から挿入します。LE100A/LE110A をパネルにしっかりと固定します。

パネルカット寸法

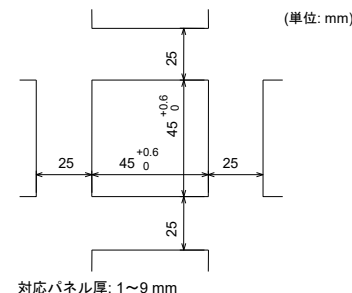

対応パネル厚: 1~9 mm

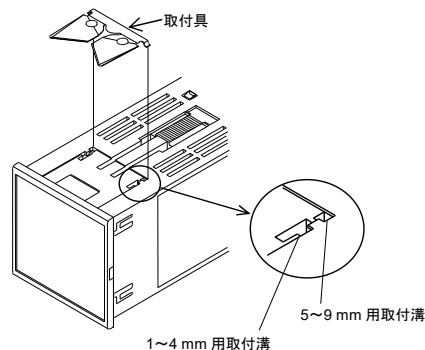

1~4 mm 用取付溝

5~9 mm 用取付溝



Back Pressure Type Indicator

LE100A/LE110A

IMR01C30-X1

NOV. 2024

Relevant instruction manual number: IMR01C20-X□, IMR01C21-E□, IMR01C28-E□
IMR01C23-X□, IMR01C24-E□, IMR01C29-E□

This manual describes only the mounting-related items of the Z-1302 specification.
For other specifications of the Z-1302, refer to the following documents:
LE100A Z-1302 Specification (IMR01C28-E□) or LE110A Z-1302 Specification (IMR01C29-E□).

■ Outline

The Z-1302 specification differs from the standard specifications in terms of the mounting brackets and mounting method.

■ Mounting method


● When the panel with 1 to 4 mm in thickness

1. Make a rectangular cutout corresponding to the number of instruments to be mounted on panel by referring to the panel cutout dimensions.
2. Since the mounting brackets are already installed on the instrument, insert the instrument into the panel from the panel cutout without removal of the brackets. Firmly fix this instrument to the panel.


● When the panel with 5 to 9 mm in thickness

1. Make a rectangular cutout corresponding to the number of instruments to be mounted on panel by referring to the panel cutout dimensions.
2. Remove the mounting brackets (two pieces for both top and bottom sides) from the instrument with a blade screwdriver.
3. Insert the mounting brackets into the mounting slots for 5 to 9 mm of the instrument.
4. Insert the instrument into the panel from the panel cutout. Firmly fix this instrument to the panel.

Panel cutout

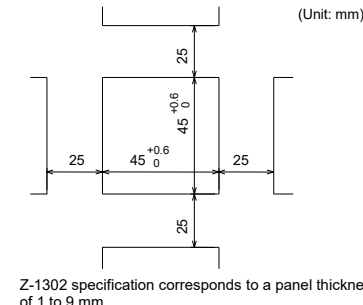

Z-1302 specification corresponds to a panel thickness of 1 to 9 mm.

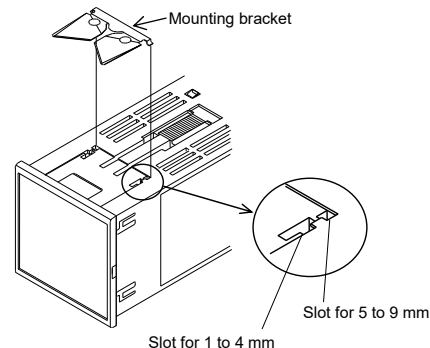

Slot for 1 to 4 mm

Slot for 5 to 9 mm

